














SPECYFIKACJA URZĄDZEŃ SERII MIX SZ & MIX SZV

TYP MASZINY [MIX]	300 SZ	500 SZ	1000 SZ	1500 SZ
	300 SZV	500 SZV	1000 SZV	1500 SZV
Pojemność całkowita [L]	300	500	1000	1500
Maksymalny wsad [L]	200	320	650	1000
Moc zainstalowana [kW]	2x7,5	2x15	2x22	2x30
Prędkość obrotowa wałów [rpm]	5-48	4-40	4-30	3-28
Sterowanie standardowe				
Masa maszyny netto [kg]	1300	1780	3400	4600
	1400	1900	3580	4850
BUSCH pompa próżniowa [m ³ /h]	-	-	-	-
	21	21	40	63
Zabezpieczenie prądowe	40	100	120	160
Opcje załadunku	PW 2/250	PW 2/250	PW 2/250	PW 2/250
Wyładunek	200L 	2x200L 	2x200L 	2x200L 
Otwieranie/ Zamykanie pokryw	 H	 H	 H	 H

MODEL MASZINY [MIX]	300 SZ	500 SZ	1000 SZ	1500 SZ
	300 SZV	500 SZV	1000 SZV	1500 SZV
Podajnik załadunkowy	o	o	o	o
PLC i HMI	S	S	S	S
Płynna regulacja obrotów	S	S	S	S
Pomiar temperatury farszu	o	o	o	o
Automatyczne dozowanie wody	o	o	o	o
System wagowy	o	o	o	o
System uszczelnień "Eeasy Clean"	o	o	o	-
	-	-	-	-
Dodatkowa ażurowa osłona górna	-	-	-	-
Szlifowana wanna i wały	S	S	S	S
Podwójny płaszcz max ciśnienie 2,0 Bar	o	o	o	o
Pełna, szczelna pokrywa	o	o	o	o
	S	S	S	S
Wały łożopatkowe	o	o	o	o

SPECYFIKACJA URZĄDZEŃ SERII MIX SZ & MIX SZV

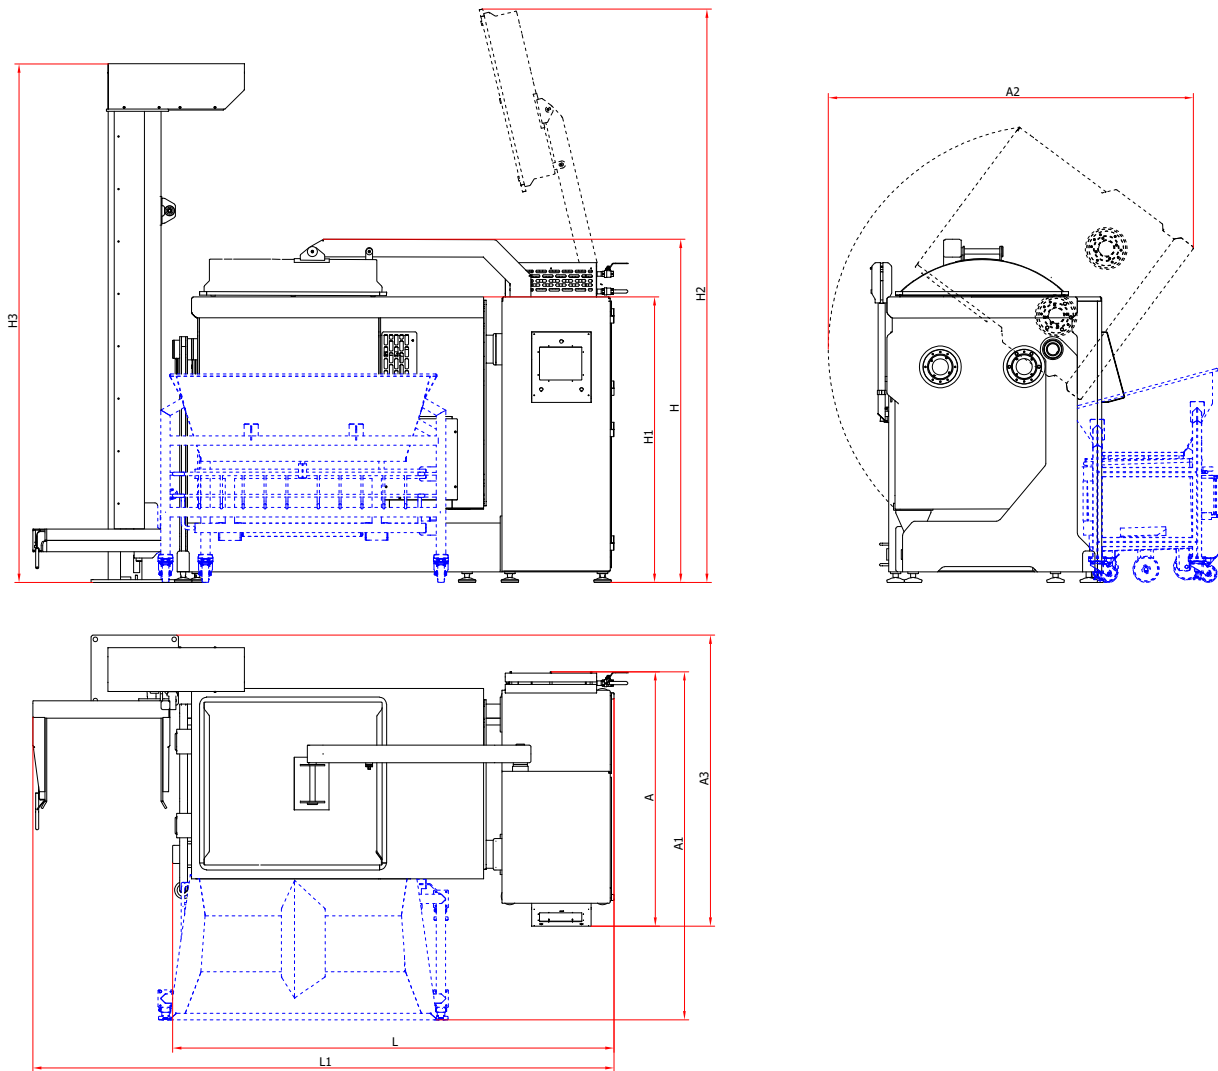

MODEL MASZINY [MIX]	300SZ	500SZ	1000SZ	1500SZ
	300 SZV	500 SZV	1000 SZV	1500 SZV
H [cm]	163	192	201	228
H1 [cm]	143	164	176	194
H2 [cm]	260	290	328	376
H3 [cm]	250	271	282	300
L [cm]	203	216	278	327
L1 [cm]	283	295	358	407
A [cm]	112	124	162	187
A1 [cm]	172	180	203	234
A2 [cm]	166	181	220	266
A3 [cm]	140	166	186	211